



NOVELTY
in the range!

FRAMEX 80

WINDOW AND DOOR SYSTEM



Installation depth
80 mm



Quantity of chambers
7 chambers



Thickness of filling
up to 52 mm



Gasket system
3-seals



Coefficient of heat transfer resistance
1,1 W/m² K

CONTACT US

Tel.: 0 800 21-00-21
e-mail : info@framex.ua


SCAN HERE

for detailed
information




framex.ua


Main profiles

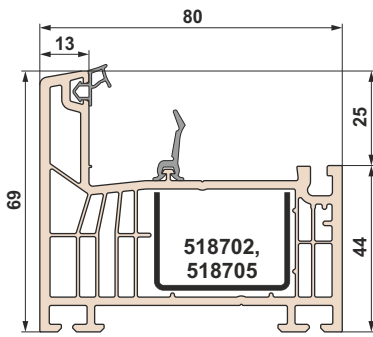


871010 Frame

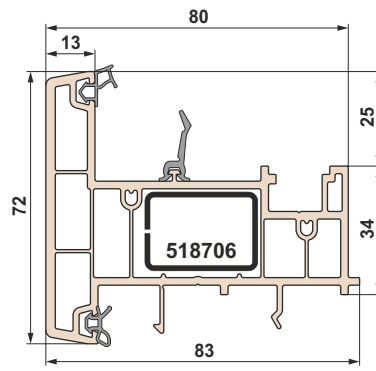


873020 Stulp

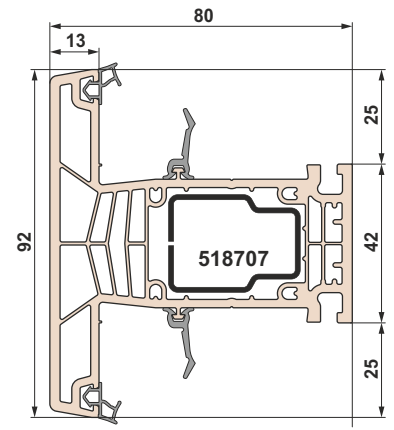


873010 Impost 80/92

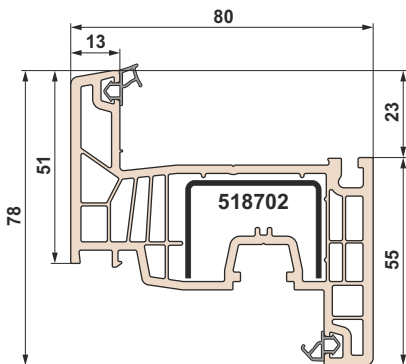


872010 Window sash

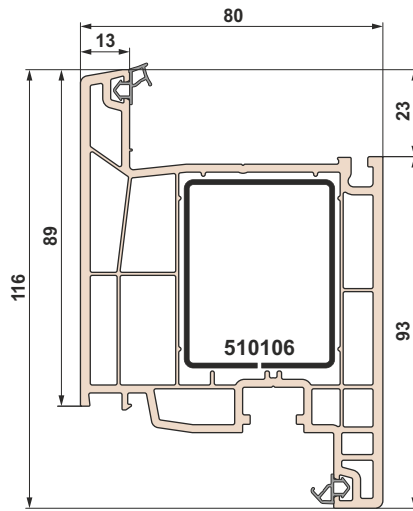


872040* Door sash of inside opening

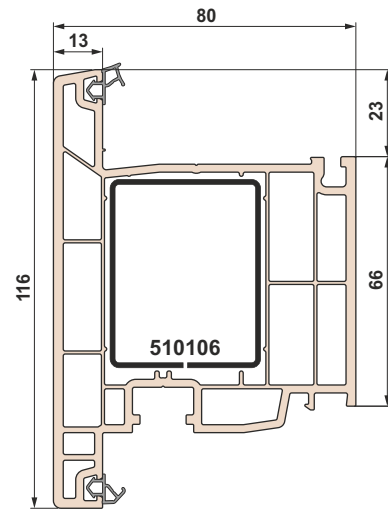


872020* Door sash of outside opening



874652 Glass bead (glass unit 52 mm)




874644 Glass bead (glass unit 42 mm)

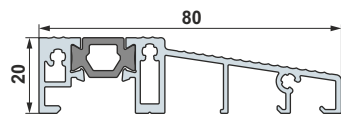


879750* Threshold with thermal insert


Accessories




FR80 Impost connector

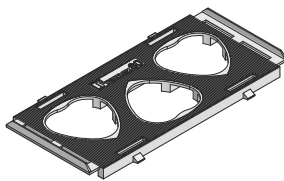

876510 Insert for glass unit

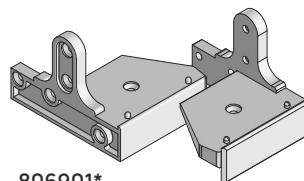


806901* Threshold adapter (set)

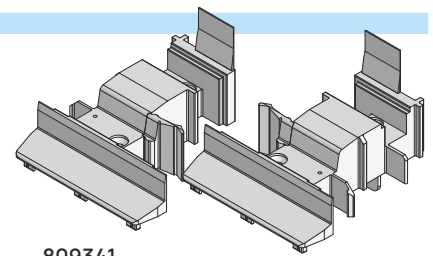


809341 End caps of shtulp (set)


Additional profiles




805001 **58 71 80** Balcony (window) connector




805002 **58 71 80** Weather bar connector

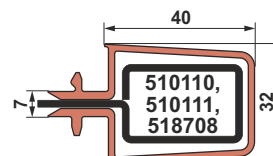


805003 **58 71 80** Pilaster connector




805004 **58 71 80** Connector 7 mm

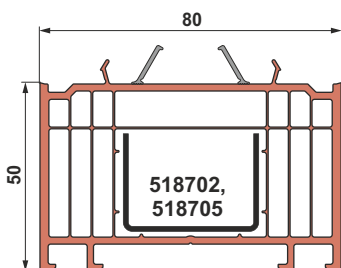


875050 **80** Expander 80/50

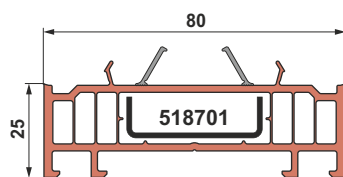

875025 **80** Expander 80/25

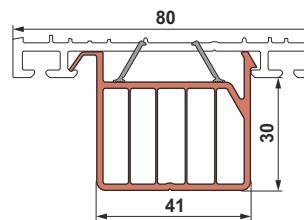

876030 **80** Rafter plate (Mauerlat) 80/30

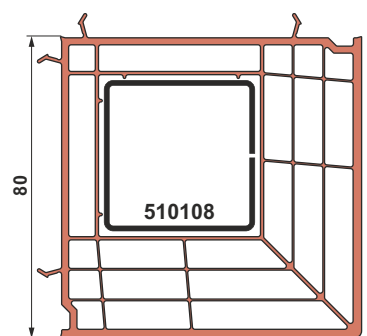

875120* **80** Corner connector 90°