



HOUSE DOOR **COLLECTION**

Take a step into the world of strength, style and security with our collection of doors based on PVC profile systems with various overlays: in the classic style - with PVC sandwich panels, and in the modern style - with metal overlays.



+380 800 21 00 21

info@framex.ua

framex-system.com

PVC PANEL GLS



RAL 9016
WHITE

58L-2
ANTHRACITE
GREY R

89L-2
GOLDEN OAK R

25L-2
NUSSBAUM R9

23L-2
DARK OAK

27L-2
MAHOGANY R



Entrance doors with improved sandwich panel, glued double-glazed windows and stainless steel moldings.

TECHNICAL SPECIFICATIONS


System	Framex 71	Framex 80
Filling thickness	32, 42 mm	44, 50 mm
Filling	PVC sandwich panel	
Insulating Glass Unit	1-chamber, 2-chamber	
Lock	multi-point	
Hinges	overhead/roller, 3-section	
Threshold	universal	
Handle	push-up/office	



AVAILABLE **VARIATIONS OF DESIGNS** FOR DOORS PVC PANEL GLS AND STEEL PANEL

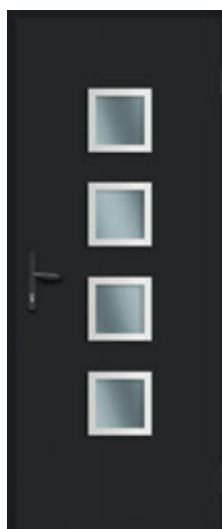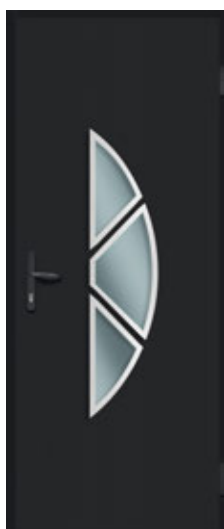

STEEL PANEL

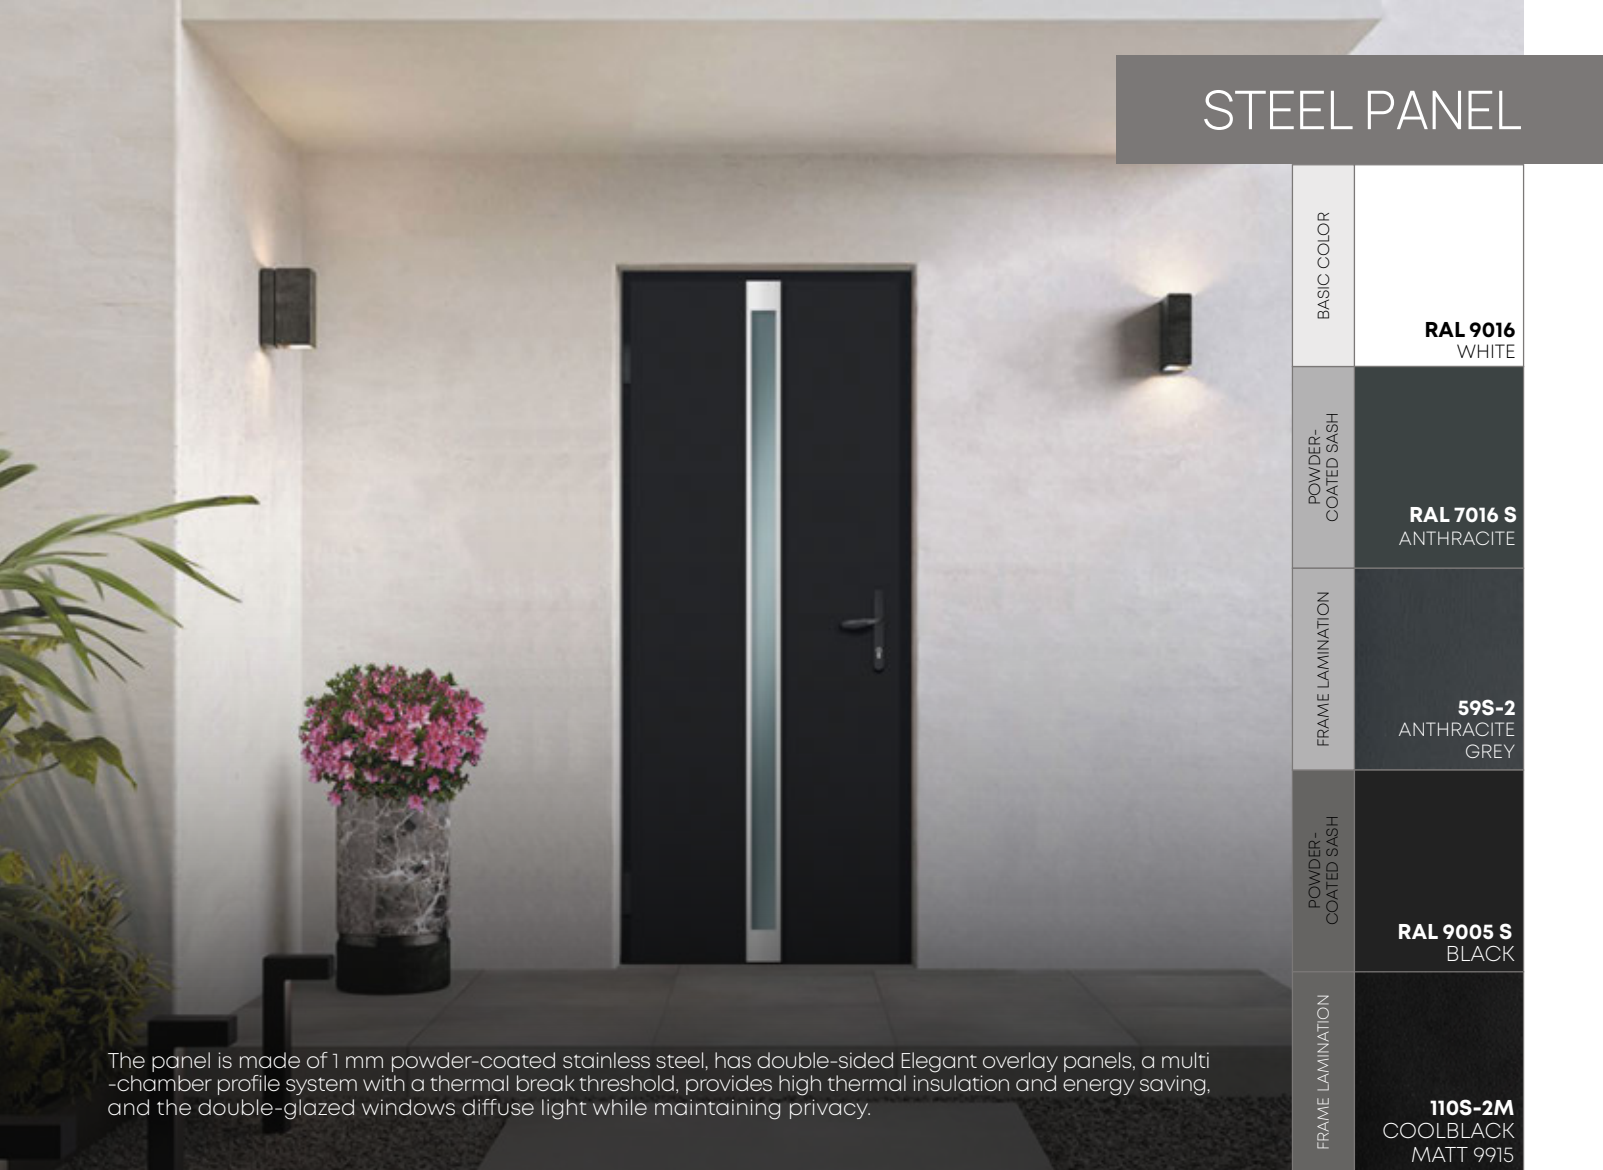

The panel is made of 1 mm powder-coated stainless steel, has double-sided Elegant overlay panels, a multi-chamber profile system with a thermal break threshold, provides high thermal insulation and energy saving, and the double-glazed windows diffuse light while maintaining privacy.

BASIC COLOR

RAL 9016
WHITE

POWDER-COATED SASH

RAL 7016 S
ANTHRACITE

FRAME LAMINATION

59S-2
ANTHRACITE
GREY

POWDER-COATED SASH

RAL 9005 S
BLACK

FRAME LAMINATION


110S-2M
COOLBLACK
MATT 9915

TECHNICAL SPECIFICATIONS

System	Framex 71	Framex 80
Stainless steel overlays		1 mm
Filling thickness	71 mm	80 mm
Filling		steel panel
Insulating Glass Unit		3-chamber
Filling - polystyrene foam	71 mm	80 mm
Decor		stainless molding
Lock		multi-point
Hinges		3D (rebate)
Threshold		aluminum with thermal insert
Handle		push/office



AVAILABLE **VARIATIONS OF DESIGNS** FOR DOORS PVC PANEL GLS AND STEEL PANEL

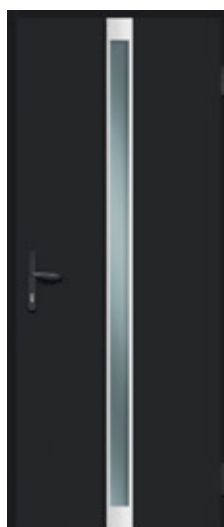

PVC PANEL

RAL 9016
WHITE

58L-2
ANTHRACITE
GREY R

89L-2
GOLDEN OAK R

25L-2
NUSSBAUM R9

23L-2
DARK OAK

27L-2
MAHOGANY R

Filling – sandwich panel or double-glazed window, built into the door leaf profile, it is possible to use an impost. Reliable, comfortable to use, economical.

TECHNICAL SPECIFICATIONS

Set	basic
System	Framex 71
Filling thickness	24, 32, 42 mm
Filling	PVC sandwich panel/HPL panel
Insulating Glass Unit	1-chamber, 2-chamber
Lock	single-point/latch/multi-point
Hinges	overhead/roller
Threshold	universal
Handle	push-button/office



AVAILABLE VARIATIONS OF DESIGNS FOR PVC PANEL DOORS

