

Classification Report

Number	25-002279-PR11 (NW-C01-02-en-01)
Owner	Kontinent-Group LLC Nebesnoji Sotni Str. 18002 Cherkasy Ukraine
Product	External pedestrian doorset, opening outwards
Designation	System: F46M Shipping name: KONTINENT-GROUP
Details	Manufacturer Kontinent-Group LLC, Cherkasy; Material Aluminium with polymer coat; Overall dimensions (W x H) 1,000 mm x 2,300 mm; Type of opening Turn; Opening direction Outwards; Closing condition closed, locked and secured in main latchbolt and auxiliary latchbolts and deadbolt; Threshold frame Manufacturer Kontinent Group Profile system F46M Material Aluminium profile without thermal break Threshold leaf seal Designation GP044 Material EPDM Lock Multi-point locking system, Secure MR2, Main and additional strike plates 6-37368-01-R-1 & 6-40032-AA-0-1, GU; Hinges 2-part, aluminium 4 pcs., LOIRA + FAPIM Dimension Leaf (W x H) 897 mm x 2,233 mm;

Special features

Result **)

Air permeability according to EN 12207:2016-12



Class: 3

Resistance to wind load according to EN 12210:2016-03




Class: C5/B5

**) Decision rule: For the evaluation of conformity, the measurement uncertainty was not taken into account.

ift Rosenheim

30.10.2025

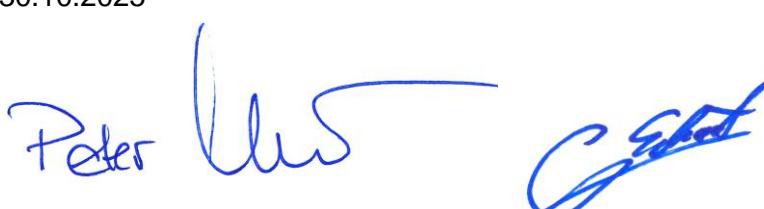

Peter Marquardt, Dipl.-Ing. (FH)
Deputy Head of Testing Department
Building Component Testing

Christian Schröder
Operating Testing Officer
Building Component Testing

Basis *)

EN 14351-1:2006+A2:2016-09

*) and corresponding national versions
(e.g. DIN EN)

Test report: 25-002279-PR11 PB-C01-02-en-01

Representation



Instructions for use

The Evidence ("Nachweis") can be used for preparing the Declaration of Performance in accordance with the Construction Products Regulation 305/2011/EU. The results obtained apply to the direct field of application determined in Annex E of EN 14351-1.

Validity

There is no time limit.

When using this document the up-to-dateness of above basis and the conformity of the product have to be observed.

Notes on publication

The ift-Guidance Sheet "Conditions and Guidance for the Use of ift-Test Documents" applies.

Identity-Check

